

DOW CORNING TORAY


Z-6883 Silane

FEATURES & BENEFITS

- Phenyl amino functional alkoxy silane
- Better thermal stability than OFS-6020

COMPOSITION

- phenylaminopropyl trimethoxysilane

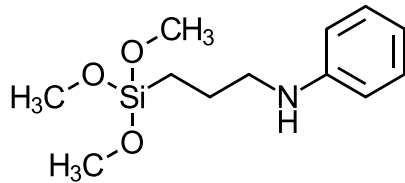

TYPICAL PROPERTIES

Specification Writers: These values are not intended for use in preparing specifications. Please contact your local Dow Corning sales office or your Global Dow Corning Connection before writing specifications on this product.

Property	Unit	Result
Appearance		Yellowish brown liquid
Viscosity, 25°C	mm ² /s	7-10
Specific gravity		1.065-1.075
purity	%	> 96

DESCRIPTION

DOW CORNING TORAY Z-6883 silane is a phenylamino functional alkoxy silane.

HANDLING PRECAUTIONS

The user should incorporate proper handling and processing procedures to avoid flame and ignition sources. Please refer to the material safety data sheet for further information.

**PRODUCT SAFETY
INFORMATION REQUIRED FOR
SAFE USE IS NOT INCLUDED IN
THIS DOCUMENT. BEFORE
HANDLING, READ PRODUCT
AND MATERIAL SAFETY DATA
SHEETS AND CONTAINER
LABELS FOR SAFE USE,
PHYSICAL AND HEALTH
HAZARD INFORMATION. THE
MATERIAL SAFETY DATA
SHEET IS AVAILABLE ON THE
DOW CORNING WEB SITE AT
DOW CORNING.COM, OR FROM
YOUR DOW CORNING SALES
APPLICATION ENGINEER, OR
DISTRIBUTOR, OR BY CALLING
DOW CORNING CUSTOMER
SERVICE.**

PACKAGING INFORMATION

For information, please consult your local Dow Corning representative.

LIMITATIONS

This product is neither tested nor represented as suitable for medical or pharmaceutical uses.

HEALTH AND ENVIRONMENTAL INFORMATION

To support Customers in their product safety needs, Dow Corning has an extensive Product Stewardship organization and a team of Product Safety and Regulatory Compliance (PS&RC) specialists available in each area.

For further information, please see our Web site, dowcorning.com or consult your local Dow Corning representative.

LIMITED WARRANTY INFORMATION – PLEASE READ CAREFULLY

The information contained herein is offered in good faith and is believed to be accurate. However, because conditions and methods of use of our products are beyond our control, this information should not be used in substitution for customer's tests to ensure that our products are safe, effective, and fully satisfactory for the intended end use. Suggestions of use shall not be taken as inducements to infringe any patent.

Dow Corning's sole warranty is that our products will meet the sales specifications in effect at the time of shipment.

Your exclusive remedy for breach of such warranty is limited to refund of purchase price or replacement of any product shown to be other than as warranted.

**DOW CORNING SPECIFICALLY
DISCLAIMS ANY OTHER
EXPRESS OR IMPLIED
WARRANTY OF FITNESS FOR A
PARTICULAR PURPOSE OR
MERCHANTABILITY.**

**DOW CORNING DISCLAIMS
LIABILITY FOR ANY
INCIDENTAL OR
CONSEQUENTIAL DAMAGES.**

We help you invent the future.™

dowcorning.com